




# HICAP CAPILLARY GC COLUMNS


## HiCap 25

- 25% Phenyl-75% Methylpolysiloxane
- USP phase G28
- Medium polarity
- Cross-linked



HiCap 25 is a medium polarity column, incorporating 25% phenyl and 75% methylpolysiloxane. It shows different selectivities compared to other medium polarity columns, so that than HiCap 25 is useful for identifying and quantitating a variety of analytes. The phase has a maximum temperature limit of 260°C to 280°C for isothermal analyses and 280°C to 300°C for temperature programmed analyses, depending on film thickness.

### Solvents

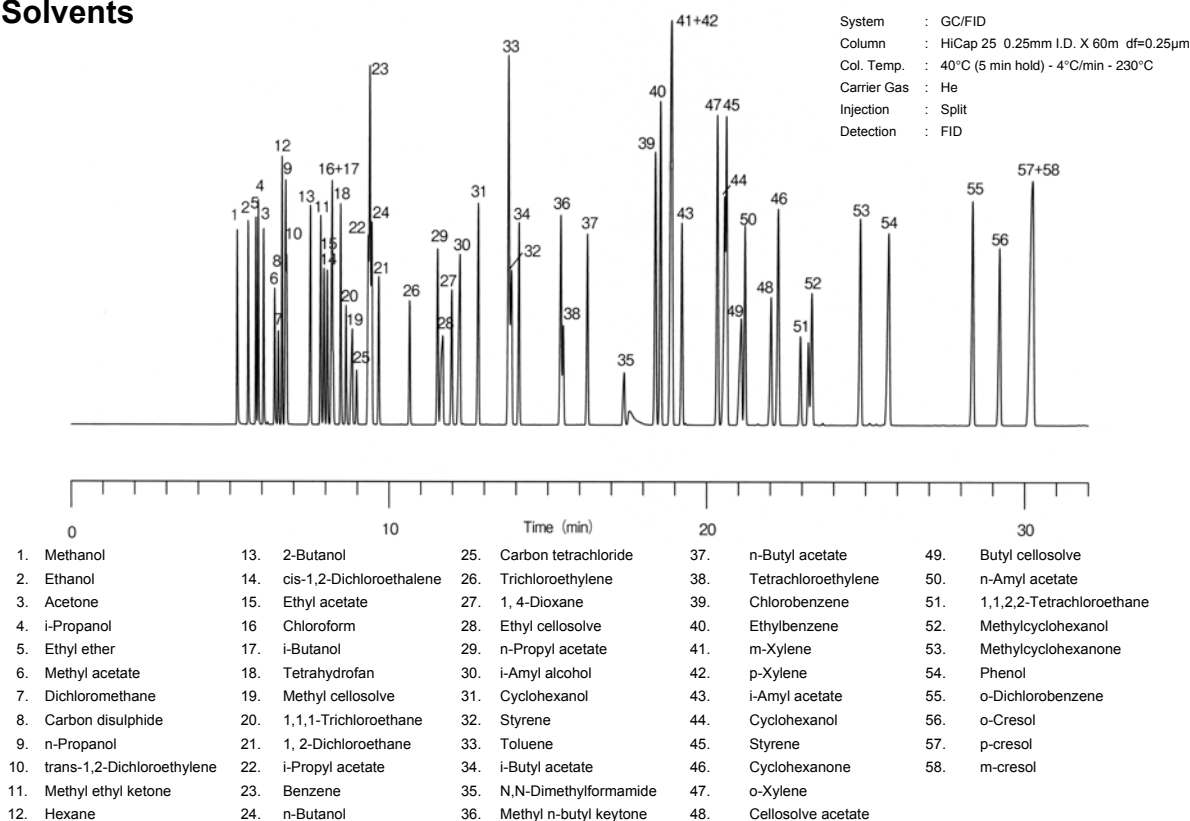

### HiCap 25

i.d. (mm)	Length (m)	Film Thickness (µm)	Part Number
0.25	15	0.25	HI25-0.25-15-0.25
		0.50	HI25-0.25-15-0.50
		1.00	HI25-0.25-15-1.00
	30	0.25	HI25-0.25-30-0.25
		0.50	HI25-0.25-30-0.50
		1.00	HI25-0.25-30-1.00
	60	0.25	HI25-0.25-60-0.25
		0.50	HI25-0.25-60-0.50
		1.00	HI25-0.25-60-1.00

i.d. (mm)	Length (m)	Film Thickness (µm)	Part Number
0.32	15	0.25	HI25-0.32-15-0.25
		0.50	HI25-0.32-15-0.50
		1.00	HI25-0.32-15-1.00
	30	0.25	HI25-0.32-30-0.25
		0.50	HI25-0.32-30-0.50
		1.00	HI25-0.32-30-1.00
60	0.25	HI25-0.32-60-0.25	
	0.50	HI25-0.32-60-0.50	
	1.00	HI25-0.32-60-1.00	
0.53	15	1.00	HI25-0.53-15-1.00
	30	1.00	HI25-0.53-30-1.00